HIGH RESOLUTION INDOOR/OUTDOOR COLOR NIGHT VISION CAMERA KIT

FEATURES

- High resolution AIS (Advanced Image Sensor) produces sharp and clear video at 480 TV lines of resolution
- Lorex Pure Flat™ lens eliminates image curving for an undistorted view
- Anti-glare technology ensures clear images under strong lighting situations
- Exclusive built-in auto-mechanical infrared filter achieves accurate color reproduction in varying lighting conditions
- Advanced day/night mode - picture automatically switches to B&W delivering better clarity in low light conditions
- 18 IR LEDs provide up to 50ft/15m* night vision range
- Weatherproof design is ideal for outdoor and indoor applications (IP66)**
- Versatile 3D flex stand provides flexible mounting options: ceiling, counter or wall mountable
- A single 4-in-1 power adapter provides power to all 4 cameras (available in 4-pack camera kit only)

AIS IMAGE SENSOR + EXCLUSIVE INFRARED FILTER TECHNOLOGY

Accurate color reproduction in varying lighting conditions

PURE FLAT™ LENS

Eliminates image curving for an undistorted view

ANTI-GLARE TECHNOLOGY

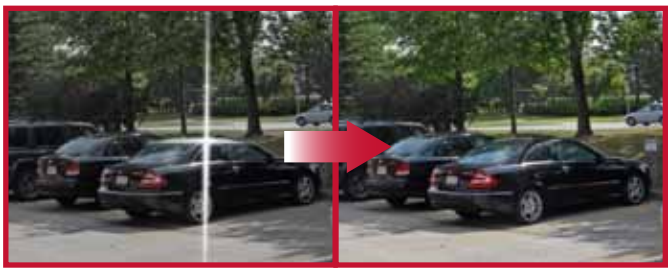

Clear images under strong lighting conditions

LOREX

HIGH RESOLUTION INDOOR/OUTDOOR COLOR NIGHT VISION CAMERA KIT

SPECIFICATIONS

Image Sensor:	High Resolution 1/4" Advanced Color Image Sensor
Video Format:	NTSC
Effective Pixels:	H: 656, V: 492
Resolution:	480 TV Line
Scan System:	2:1 Interlace
Sync System:	Internal
S/N Ratio:	More than 48dB
Iris:	AES
AES Shutter Speed:	1/60~1/50,000 Sec
Mini Illumination:	0.6 Lux without IR LED, 0 Lux with IR LED
Video Output:	Composite 1.0Vpp @ 75 ohm
Lens/Lens Mount:	5.1mm F 2.8/ Fixed
FOV (Diagonal):	50 degrees
Termination:	BNC Type
IR LED/ Night Vision Range:	18 pieces / 850 nm / 50ft/15m
Power Requirement:	12V DC
Power Consumption:	250 mA or 3W max
Operating Temp Range:	-10° ~ 50° C
Environmental Rating:	IP 66

CONTENTS

- 4 or 1 x Camera
- 4 or 1 x Mounting stand
- 4 or 1 x 60ft BNC/DC extension cables
- 4-in-1 or 1 Power adaptor

DIMENSIONS

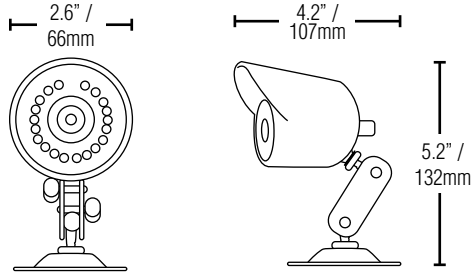

MOUNTING OPTIONS

TABLE MOUNT | CEILING MOUNT | WALL MOUNT

PRODUCT INFORMATION

CVC6950PK4B

UPC:	7-78597-69500-7
Package Dimensions: W x D x H	315mm x 140mm x 295mm/ 12.4" x 5.5" x 11.6"
Package Cube:	0.013CBM / 0.459CBF
Package Weight:	3.5 kg / 7.75 lbs

CVC6950B

UPC:	7-78597-69501-4
Package Dimensions: W x D x H	175mm x 145mm x 138mm/ 6.8" x 5.7" x 5.4"
Package Cube:	5.926716 CBM / 209.3 CBF
Package Weight:	0.95 kg / 2.09 lbs

CVC6950PKB

UPC:	7-78597-69502-1
Package Dimensions: W x D x H	175mm x 145mm x 138mm/ 6.8" x 5.7" x 5.4"
Package Cube:	5.926716 CBM / 209.3 CBF
Package Weight:	0.95 kg / 2.09 lbs

CVC6954PKB

UPC:	7-78597-69503-8
Package Dimensions: W x D x H	315mm x 140mm x 295mm/ 12.4" x 5.5" x 11.6"
Package Cube:	0.013CBM / 0.459CBF
Package Weight:	3.5 kg / 7.75 lbs

*IR Illumination range under ideal conditions. Objects at or beyond this range may be partially or completely obscured, depending on the camera application.
**Not intended for submersion in water. Installation in a sheltered location recommended.

Lorex Technology Inc.

250 Royal Crest Court
Markham, Ontario L3R 4C1
Canada

3700 Koppers Street
Baltimore, Maryland 21227
USA

©2011 Lorex Technology Inc.
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE

5-07112011